



WALRUS HQ_B

domestic pressure booster system

HQ_B Booster System


Complete, all-in-one unit consisting of pump, motor, pressure tank and electronic controller. Provides constant pressure ensuring the pump starts when water is consumed and operates continuously until water is not required.

Features:

- Compact design and quiet operation
- Top quality corrosion resistant material
- Built in dry-run shut off
- Automatic reset
- Built in thermal overload
- Pressure vessel as anti-cycling feature
- Suction lift up to 7.6m (with foot valve)

Operating Conditions:

- Ambient Temperature: Max. +40°C
- Liquid Temperature: +4°C ~ +40°C
- System Pressure: Max. 8.5kg/cm²
- Relative Humidity: Max. 85% (RH)

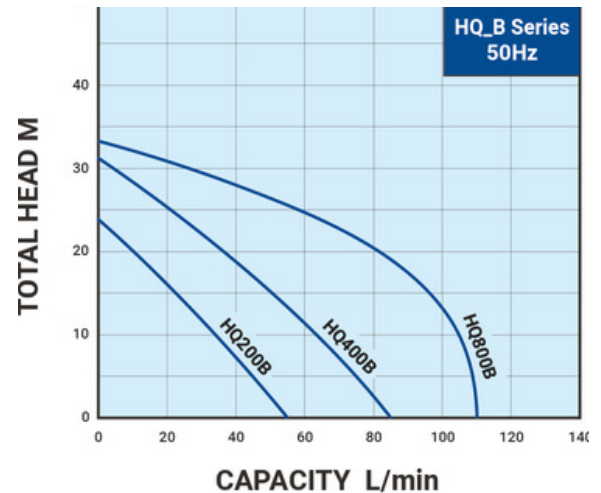

Pump Models:

Pump Type	Power		Inlet	Outlet	Preset Activation	Max. Flow	Max. Head
	kW	HP					
HQ200B	0.18	0.24	1"	1"	1.6	55l/m	24m
HQ400B	0.37	0.5	1"	1"	2.0	85l/m	31m
HQ800B	0.75	1	1"	1"	2.0	110l/m	33m



N.J. POWER & CO. LTD.

WATER PUMPS & FOUNTAIN TECHNOLOGY

Quietly Powerful | Reliably Yours