



WALRUS WQ_B

domestic pressure booster system

WQ_B Booster System

Complete, all-in-one unit consisting of pump, motor, pressure tank and electronic controller. Provides constant pressure ensuring the pump starts when water is consumed and operates continuously until water is not required.

Features:


- Quiet operation through water cooled motor
- Antimicrobial feature to prevent bacterial growth
- Built in dry-run shut off
- Dual outlet design for different installation spaces
- Built in thermal overload
- Pressure vessel as anti-cycling feature
- Top quality corrosion resistant material

Operating Conditions:

- Ambient Temperature: Max. +40°C
- Liquid Temperature: +4°C ~ +40°C
- System Pressure: Max. 8.5kg/cm²
- Relative Humidity: Max. 85% (RH)

Pump Models:

Pump Type	Power		Inlet	Outlet	Preset Activation	Max. Flow	Max. Head
	kW	HP					
WQ200B	0.18	0.24	1"	1"	1.6	55l/m	24m
WQ400B	0.37	0.5	1"	1"	2.0	85l/m	31m
WQ800B	0.75	1	1"	1"	2.0	110l/m	33m

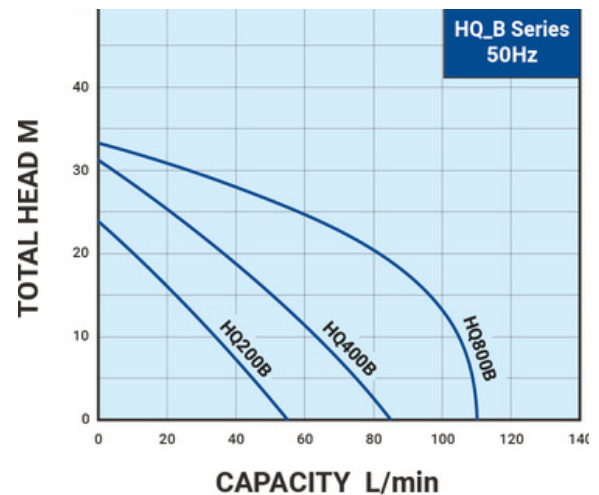

N.J. POWER & CO. LTD.

WATER PUMPS & FOUNTAIN TECHNOLOGY

Quietly Powerful | Reliably Yours