



STAIRS X1-03

submersible drainage pump

X1-03 Drainage Pump Series

Ideal solution for domestic grey water and light wastewater drainage. Compact design with top discharge outlet ideal for installation in small manholes and areas subject to flooding.



Cable Float (MA)




Fixed Float (MS)



Ball Float (ML)

Specification:

- IP68 Protection Class
- Thermal Protection
- Liquid Temperature: 0°C ~ +50°C
- Max. Solids Passage: 10mm
- Max Immersion: 5m
- Flow rate up to 160l/m

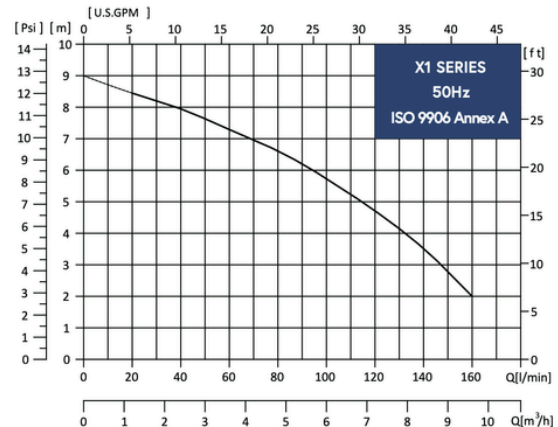

Pump Data:

| Pump Type | Power | | Outlet | Current | Capacitor | Max. Flow | Max. Head |
|-----------|-------|------|--------|---------|-----------|-----------|-----------|
| | kW | HP | | | | | |
| X1-03 | 0.25 | 0.33 | 1¼" | 1.9A | 8uF | 160l/m | 9m |

