



STAIRS XV

submersible drainage pump

XV Drainage Pump Series

All stainless steel submersible vortex sewage pump designed for residential and commercial wastewater, pure water transferring and drainage applications. Compact design with side discharge outlet.




Applications:

- Basement Water Removal
- Wastewater Drainage
- Effluent Handling
- Water Transfer

Specification:

- IP68 Protection Class
- Thermal Protection
- Liquid Temperature: 0°C ~ +35°C
- Max. Solids Passage: 35mm (07)
- Max. Solids Passage: 50mm (10/15)
- Flow rate up to 450l/m

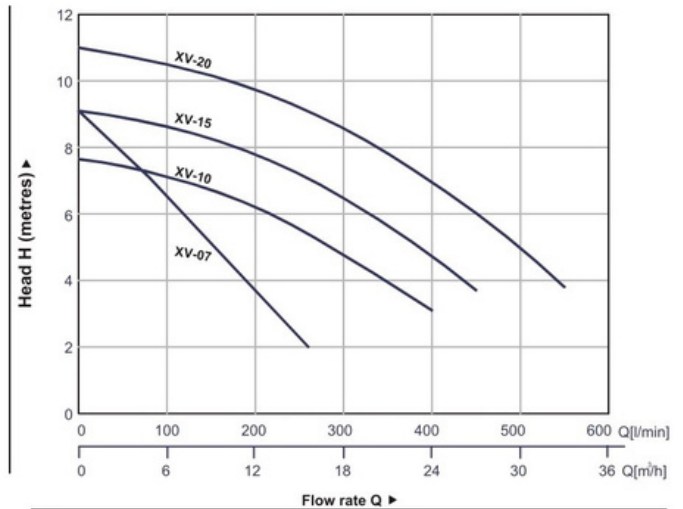

Pump Data:

Pump Type	Power		Outlet	Current	Capacitor	Max. Flow	Max. Head
	kW	HP					
XV-07MA40	0.55	0.75	1½"	4.1A	15uF	260l/m	9.1m
XV-10MA50	0.75	1	2"	5.5A	22uF	400l/m	7.7m
XV-15MA50	1.1	1.5	2"	6.8A	30uF	450l/m	9.1m

