



4" ST SERIES

submersible borehole pump

ST Submersible Borehole

4" Submersible Pump designed for pressure boosting, water supply and irrigation systems. Constructed mainly from stainless steel for close coupling with 4" Submersible Motor.



Features:


- Floating noryl impeller for superior sand handling
- Built in non-return valve
- Optimum resistance to abrasion
- Discharge connection 1¼"
- Shaft coupling made from AISI 304 Stainless

Operating Conditions:

- Liquid Temperature: Max. +60°C
- Maximum Delivery: 3m³/h
- Maximum Pressure: 139m
- Relative Humidity: Max. 85% (RH)

Pump Models:

*Additional models available

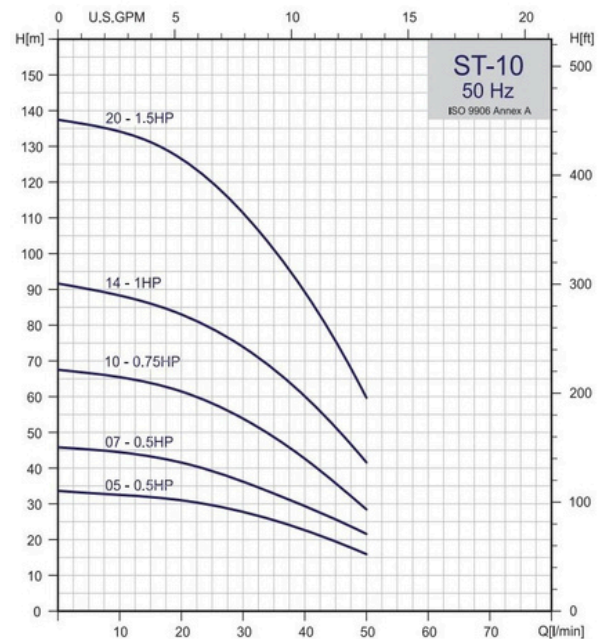

Pump Type	Motor		Outlet	Q=Delivery	Q=Delivery				
	kW	HP			l/min	15	20	30	40
ST-0510	0.37	0.5	1¼"	67	55	46	33	-	-
ST-1010	0.55	0.75	1¼"	67	64	61	54	43	28
ST-1014	0.75	1	1¼"	92	86	83	74	60	42
ST-1020	1.1	1.5	1¼"	139	131	127	111	90	60

TOTAL HEAD IN METRES



N.J. POWER & CO. LTD.
WATER PUMPS & FOUNTAIN TECHNOLOGY

Quietly Powerful | Reliably Yours